



# KSR119-16P

## 1U rack mount 19" TFT console with 16-port KVM switch


KSR119-16P is cost efficiency industrial level input solution, easy to install and use.

KSR119-16P provide optimize your space utilization by controlling your system in just 1U rack space.


With KSR119-16P, you can control 16 platforms by using built-in KVM switch and easily expand the connections up to 8 levels with the combination of KVM switch boxes.

### Features

- Single Rail easy to install and use
- Support 17 various keyboard languages
- Build-in 16-port Combo-free KVM switch
- Bright Active Matrix TFT Display
- OSD function (On Screen Display) for LCD display
- Durable keyboards
- Panel protected by tempered glass
- Support USB K/B, touchpad



### Dimension and diagram

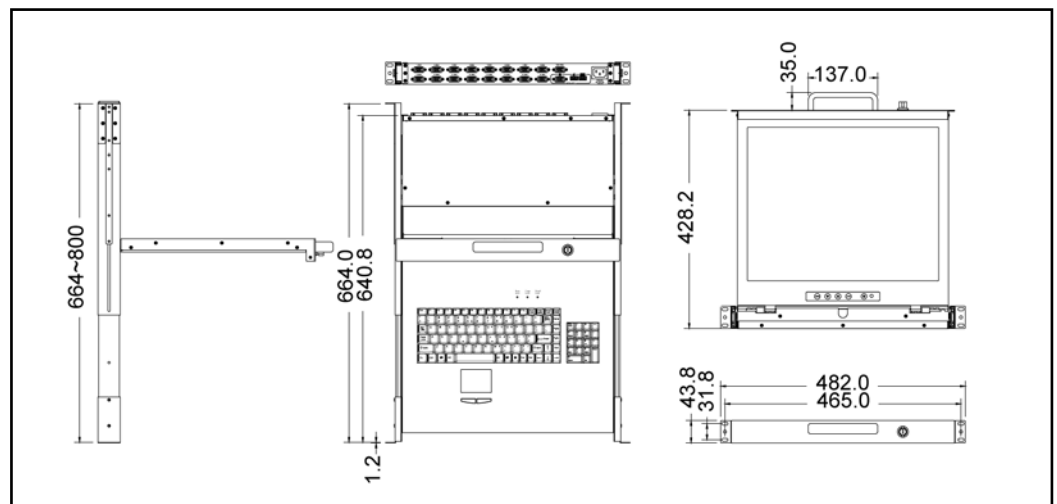

# KSR119-16P<sup>1</sup>U rack mount 19" TFT console with 16-port KVM switch

Model Name	KSR119-16P
Number of ports	16
Dimension	642 x 447.5 x 44 mm / 22.4 x 17.6 x 1.7 inches
Package Dimension	827 x 564 x 206 mm / 32.6 x 22.2 x 8.1 inches
Net Weight	14.5 Kg / 32.0 lbs
Gross Weight	22.0 Kg / 48.5 lbs
Display Size	19 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1280 x 1024 (SXGA)
Pixel Pitch	Supports 0.098 mm x 0.294 mm
Viewing Angle (CR>10)	Right-Left view 140° (Typ) Up-Down View 140° (Typ)
Contrast Ratio	500 : 1
Brightness	White 250 cd/m <sup>2</sup> (Center 1 point Typ)
Back Light	Four Lamps for Back Light
Supported Colors	16.2M Colors (6-bit with FRC)
Response Time	Rising Time 2 ms, Decay Time 10 ms
Operating System	DOS, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2, SUN and USB
System Cables	VGA + 2 x PS/2 or VGA + 1 x USB cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	25W, 21.05W for Panel
Temperature	Operate 0° ~ 50° C / 32° ~ 122° F Storage-20° ~ 60° C / -4° ~ 140° F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	USA, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japan, Taiwan, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

## Ordering Optional

Color (Black / Beige / OEM color)

Cherry keyboard with trackball (PS/2 only)

Additional SUN function key

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m